NIAGARA HORIZONTAL WITH A THERMOSTAT

Technical specification for single version

wysokość [mm]	szerokość [mm]	rozstaw podłączeń [mm]	głębokość [mm]	od ściany do otworów zasilających [mm]	ciężar grzejnika [kg]	pojemność grzejnika [dm3]	Moc [W] 75/65/20
295	600	50	74	44	4,6	1,1	228
295	1000	50	74	44	7,2	1,7	344
295	1500	50	74	44	10,4	2,3	474
370	600	50	74	44	5,8	1,4	279
370	1000	50	74	44	9,0	2,1	422
370	1500	50	74	44	13,0	2,9	594
445	600	50	74	44	6,9	1,7	329
445	1000	50	74	44	10,8	2,5	498
445	1500	50	74	44	15,6	3,5	701
520	600	50	74	44	8,0	2,0	379
520	1000	50	74	44	12,5	2,3	573
520	1500	50	74	44	18,2	4,1	807
595	600	50	74	44	9,2	2,3	428
595	1000	50	74	44	14,3	3,3	647
595	1500	50	74	44	20,8	4,7	911

Technical specification for double version

wysokość [mm]	szerokość [mm]	rozstaw podłączeń [mm]	głębokość [mm]	od ściany do otworów zasilających [mm]	ciężar grzejnika [kg]	pojemność grzejnika [dm3]	Moc [W] 75/65/20
295	600	50	86	56	8,5	1,9	401
295	1000	50	86	56	13,7	3,0	622
295	1500	50	86	56	20,1	4,3	887
370	600	50	86	56	10,6	2,4	492
370	1000	50	86	56	17,0	3,7	762
370	1500	50	86	56	25,1	5,4	1086
445	600	50	86	56	12,7	2,9	580
445	1000	50	86	56	20,4	4,5	899
445	1500	50	86	56	30,1	6,5	1282
520	600	50	86	56	14,8	3,4	668
520	1000	50	86	56	23,8	5,2	1034
520	1500	50	86	56	35,1	7,6	1475
595	600	50	86	56	16,9	3,9	754
595	1000	50	86	56	27,2	6,0	1168
595	1500	50	86	56	40,1	8,6	1665

Power levels for other parameters look page 180

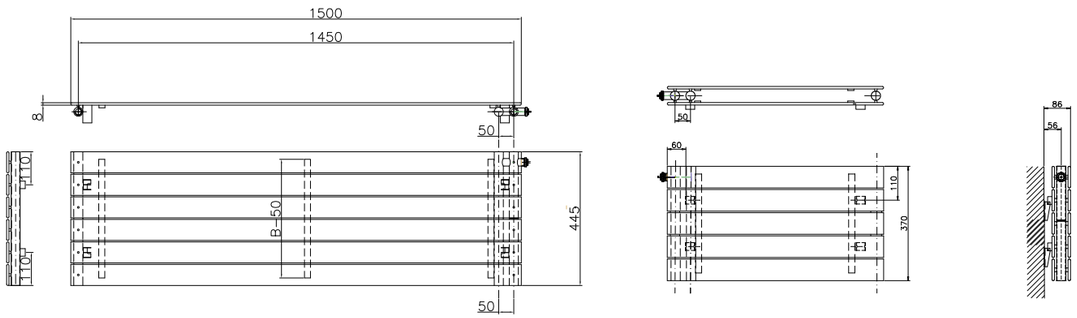

NIAGARA HORIZONTAL WITH A THERMOSTAT

Decorative, Energy-efficient

Designed as an alternative for flat radiators. The horizontal Niagara with a built in thermostat displays yet another concept in the arrangment of modern interiors.

- **Horizontal pipes:**: round Ø 30
- **Vertical pipes:** rectangular 8 x 70 mm
- **Thermostat:** mounting thread M 30 x 1,5
- **Detail work:** radiator made from low-carbon steel with powder coated finish
- **Standard colours:** white RAL 9003 or anthracite RAL 7016
- **Mounting:** mounting kit included
- **Accessories:** side covers
- **Further information:** Thermostatic head included

KOLOR
RAL colour system and special colours available

6 YEARS
Warranty

95°C
Maximum temperature

4 bar
Maximum work pressure

Adittional hangers

- **Types of connections:**



Standard connections

- **Recommended valves kits** details on pages 183-184

Combined valve

6+2 WARRANTY
2 additional years of warranty when purchasing valves