


MULTI DOUBLE



Height [mm]	Width [mm]	Collectors/connections spacing [mm]	Depth [mm]	From wall to power holes [mm]	Weight of the radiator [kg]	Radiator capacity [dm ³]	Power [W] 55/45/20	Power [W] 75/65/20	Power [W] 90/70/20
715	500	450	129-139	94-104	10,3	5,8	289	525	650
715	600	550	129-139	94-104	11,9	6,8	327	594	736
715	750	700	129-139	94-104	14,4	8,4	389	706	874
715	900	850	129-139	94-104	16,9	9,9	446	809	1002
995	500	450	129-139	94-104	15	8,7	417	757	937
995	600	550	129-139	94-104	17,5	10,2	474	861	1066
995	750	700	129-139	94-104	21,2	12,4	564	1024	1268
995	900	850	129-139	94-104	25	14,7	649	1179	1460
1135	500	450	129-139	94-104	16,4	9,5	455	826	1023
1135	600	550	129-139	94-104	19,1	11,1	516	938	1162
1135	750	700	129-139	94-104	23,1	13,6	616	1119	1386
1135	900	850	129-139	94-104	27,1	16	711	1291	1598
1485	500	450	129-139	94-104	21,3	12,4	587	1067	1321
1485	600	550	129-139	94-104	24,8	14,5	673	1222	1513
1485	750	700	129-139	94-104	30,1	17,7	796	1446	1790
1485	900	850	129-139	94-104	35,4	20,9	924	1678	2077
1765	500	450	129-139	94-104	26	15,2	715	1299	1608
1765	600	550	129-139	94-104	30,4	17,8	820	1489	1844
1765	750	700	129-139	94-104	36,9	21,8	971	1764	2184
1765	900	850	129-139	94-104	43,4	25,8	1127	2048	2535

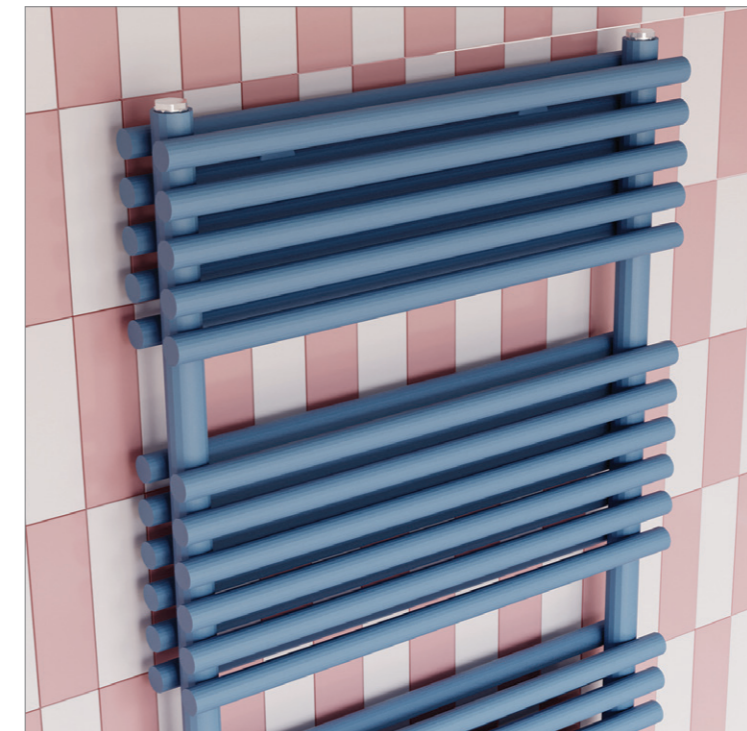

Master of warmth



- Vertical collectors: round Ø 30 mm
- Horizontal pipes: round Ø 22 mm
- Design: powder coated low-carbon steel
- Standard colours: white RAL 9003, anthracite RAL 7016
- Mounting brackets: included with a radiator
- Other information: possibility of making non-standard dimensions

Available 3D projects

Technical drawings:



Types of connections:



Recommended valve kits:

