NIAGARA DOUBLE

Height [mm] H	Width [mm] B	Collector Spacing	Depth	Space between wall and power slots	Radiator Weight [kg]	Radiator capacity [dm3]	Power level [W] 75/65/20
600	295	550	86	56	10,0	3,0	412
600	445	550	86	56	15,4	4,4	622
600	595	550	86	56	20,4	5,8	809
600	745	550	86	56	25,4	7,3	990
600	895	550	86	56	30,4	8,7	1169
600	1045	550	86	56	35,4	10,2	1345
1000	295	950	86	56	16,0	5,0	640
1000	445	950	86	56	24,7	6,9	966
1000	595	950	86	56	32,9	9,3	1255
1000	745	950	86	56	29,3	8,4	1537
1000	895	950	86	56	49,1	13,9	1814
1000	1045	950	86	56	57,3	16,2	2087
1500	295	1450	86	56	25,0	7,0	914
1500	445	1450	86	56	37,3	10,2	1379
1500	595	1450	86	56	49,6	13,5	1791
1500	745	1450	86	56	62,0	16,9	2194
1500	895	1450	86	56	74,2	20,3	2590
1500	1045	1450	86	56	86,5	23,7	2979
1800	295	1750	86	56	29,0	8,0	1075
1800	445	1750	86	56	44,3	12,1	1621
1800	595	1750	86	56	59,0	16,1	2105
1800	745	1750	86	56	73,7	20,1	2579
1800	895	1750	86	56	88,3	24,2	3043
1800	1045	1750	86	56	103,0	28,2	3501
2000	295	1950	86	56	32,0	9,0	1180
2000	445	1950	86	56	49,0	13,4	1780
2000	595	1950	86	56	65,2	17,8	2312
2000	745	1950	86	56	81,5	22,3	2832
2000	895	1950	86	56	97,7	26,8	3342
2000	1045	1950	86	56	114,0	31,2	3845

Power levels for other parameters look page 180

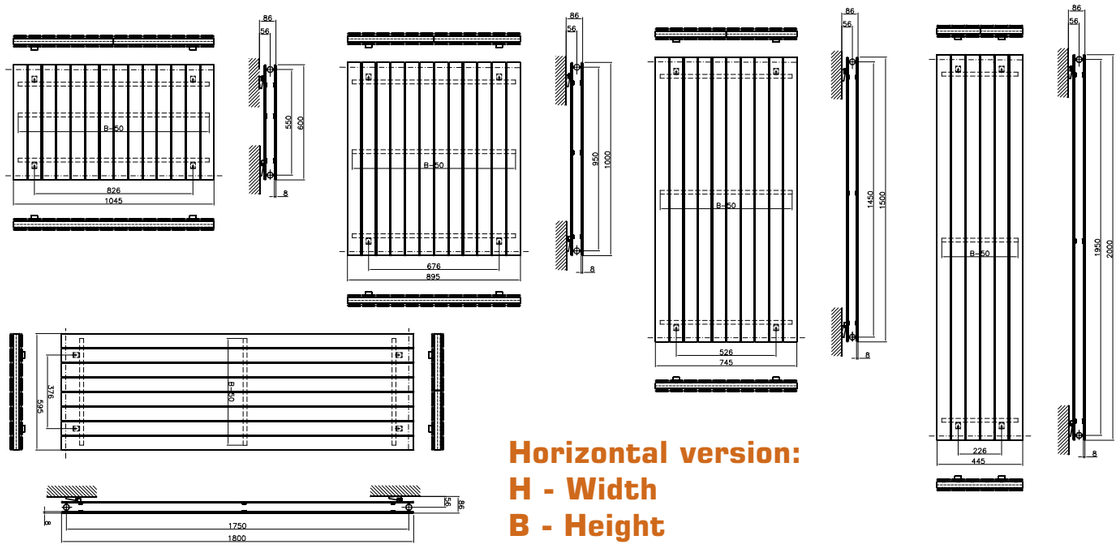

Horizontal version:
H - Width
B - Height

NIAGARA DOUBLE

Doubled Subtle charm

Thanks its flat, smooth design, NIAGARA double presents itself as an elegant source of heat matching any setting. Vertically or horizontal arranged panels create a modern visualisation, which match all interior design concepts.

- **Horizontal pipes:**: round Ø 30
- **Vertical pipes:** rectangular 8 x 70 mm
- **Detail work:** radiator made from low-carbon steel with
- powder coated finish
- **Standard colours:** white RAL 9003 or anthracite RAL 7016
- **Mounting:** mounting kit included
- **Accessories:** side covers

Further information: non-standard size available to order
Panels mounted on both sides of the power collectors

KOLOR RAL colour system and special colours available
6 YEARS Warranty
95°C Maximum temperature
4 bar Maximum work pressure
Electric version available
Hydro-electric version available
Horizontal version available
Adittional hangers

- **Types of connections:**



Standard connections



Types of bottom connections

- **Recommended valves kits** details on pages 183-184

Axial valve · Straight valve · Angular valve · Combined valve

6+2 WARRANTY 2 additional years of warranty when purchasing valves

ROOM RADIATORS